§ Wide Angle METER **§** L Series Synchroscope meter (transducer type) **DL**


1. SYNCHROSCOPE METER


Method	Туре	Rated Voltage	Rated Frequency	Approx . Consumption VA	
				Start side	Bus side
Single phase	DL-110ND-12	110V	Serve 50Hz & 60Hz	0.2VA	4.0VA
3-phase	DL-110ND-33	110V	Serve 50Hz & 60Hz	0.4VA each phase	4.0VA
		220V	Serve 50Hz & 60Hz	0.4VA each phase	4.0VA

▶ In the case of rating exceeding those above, use an 110V meter together with an external CT.

CONNECTION DIAGRAM

Single Phase DL-110ND-12






3-phase

DL-110ND-33

DIMENSIONS

Single phase DL-110ND-12 3-phase DL-110ND-33

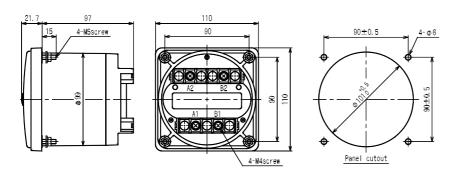

 DAIICHI ELECTRONICS CO., LTD. http://www.daiichi-ele.co.jp

 $Electrical \ indicating \ meter \ Catalog \ e-99-024/-$