

§Small-sized plug-in transducer§

1 output type

Resistance temperature transducer

FSRH

Application

By inputting resistance value of a 3-wire thermal resistance based on the JIS, the device insulates input and output, and then converts thermal electromotive forces into an output proportional to temperature. Up to 16 units can be housed in an installation base.


Feature

1. Compact and high withstand voltage.
2. Withstand voltage between input/output/auxiliary supply/outer case is AC2, 000V (50/60Hz) for 1 min..
3. Constant voltage/current output type. No need to adjust the product if it operates within load resistance range.
4. A LED can confirm status of electric power applied.
5. Zero/span is adjustable. ($\pm 2\%$ adjustable)
6. Plus (+) or minus (-) burnout can be specified.
7. 3-conducting wire type.




23 × 76 × 125mm/160g

Block Diagram

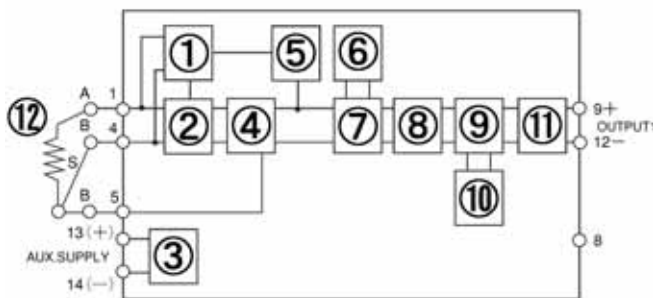

Specified current configuration circuit
 Burnout detecting circuit
 Insulated power source circuit
 Differential amplifying circuit
 Linearized circuit
 Oscillating circuit
 Pulse width modulation circuit
 Photo coupler insulation
 Pulse width demodulation circuit
 Reference voltage
 Output circuit
 thermal resistance

Connection diagram (socket)

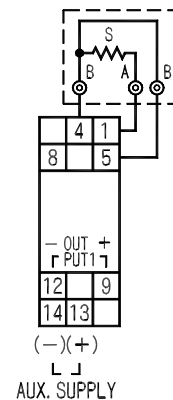

Specified current

Specified current is a current flowing into a thermal resistance. Change of resistance value can be measured by voltage drop caused by the specified current. Standard specified current is 2mA.

External conducting wire resistance range

External conducting wire resistance is the conducting wire resistance value which is the result of subtracting the resistance value of objective resistance element. As an influence of external conducting wire resistance, it compensates when resistance values of all conducting wires are equivalent, but it becomes error if resistance values of all conducting wires are different. Taking the variousness of conducting wires into consideration, use it in a range less than or equal to 50 Ω per 1 line.

§Small-sized plug-in transducer§

1 output type

Resistance temperature transducer

Specification

How to specify

Type name

FSRH

Specification code

□ □ □ X □ □ □

Kind of thermal resistance	Input	Output (load resistant)	Auxiliary supply	Power fuse	Burnout	Common specification
1 : Pt100 at 0 Temperature span 50 Specified current: 2mA	A1 :0-50	1 :DC0-100mV(200)	F :AC/DC80-264V Rated Voltage AC100/110V 50/60Hz AC200/220V 50/60Hz DC100/110V 5 :DC24V (DC19-30V)	1 :without fuse 2 :with fuse	1 :plus 2 :minus	Conversion accuracy: ± 0.3% Temperature characteristics: 0.3%/10 Response time: 0.5s/90% Burnout time: 5s Allowable conducting wire resistance: 50 /line Consumption VA: At AC110V: 4.0VA At AC220V: 5.0VA At DC110V: 2.5W At DC24V: 2.5W Weight: Without socket: approx.130g With socket: approx.160g
	A2 :0-60	2 :DC0-1V (200)				
	A3 :0-80	3 :DC0-5V (600)				
	A4 :0-100	4 :DC0-10V (2k)				
	A5 :0-120	5 :DC1-5V (600)				
	A6 :0-150					
2 : Pt50 at 0 Temperature span 100 Specified current: 2mA	A7 :0-200	A :DC0-1mA (10k)				
	A8 :0-300	B :DC0-5mA (2k)				
	B1 :-10+40	C :DC0-10mA (1k)				
3 : JPt100 at 0 Temperature span 50 Specified current: 2mA	B2 :-10+50	D :DC0-16mA (600)				
	B3 :-10+60	E :DC1-5mA (3k)				
	C1 :-20+40	F :DC4-20mA (750)				
	C2 :-20+50					
	C3 :-20+60					
	C4 :-20+80					
Z : other than those above*1 (See product range)	C5 :-20+100					
	C6 :-20+120					
	D1 :-30+50					
	D2 :-30+60					
	D3 :-30+80					
	E1 :-50+50					
	E2 :-50+60					
	E3 :-50+80					
	E4 :-50+100					
	E5 :-50+120					
	E6 :-50+150					
	F1 :-70+30	Z :other than those above *1 (See product range)				
G1 :-100+100						
ZZ other than those above *1 (See product range)						

*1 Consult with us for specification other than those indicated in the table above.

Product Range (including special handling)

Input		Output
Ni 508.4 : 50 (specified current: 1mA)	Pt: to 850	Current output: 1mA-20mA
Cu 100 : 50 (specified current: 2mA)	JPt: to 500	Voltage output: 10mV-10V *2
Cu 50 : 100 (specified current: 2mA)		

*2 Plus/minus output is not manufacturable.