

CONSTANT RESPONSE

CRTP -

Use

Against various kinds of DC input signals which are taking a sudden change, this converter provides a DC output changing at a preset constant speed.

Features

1. Time is settable from front.
2. Constant voltage/current output.
3. Withstand voltage between electric circuit and outer case is AC2, 000V (50/60Hz) for 1 minute, or between input/output and auxiliary supply is AC1, 500V (50/60Hz) for 1 minute. Non-insulated between input and output.
4. Impulse withstands voltage 5kV, 1.2/50µs (between electric circuit and outer case), and positive/negative polarity 3 times each is guaranteed.

Specification

Input (input resistance or voltage drop)		Output (load resistance)	Auxiliary supply	Common specification
A1 : DC0-10mV (approx.1MΩ)	C1 : DC0-10 µA (100mV) *1	1 : DC0-100mV (200)	1 : AC100V±10%, 50/60Hz	Tolerance: ± 0.5% *2 Consumption VA: AC power source:3VA DC power source:4W Weight: AC power source:450g DC power source:300g
A2 : DC0-50mV (approx.1MΩ)	C2 : DC0-100 µA (100mV)	2 : DC0-1V (200)	2 : AC110V±10%, 50/60Hz	
A3 : DC0-60mV (approx.1MΩ)	C3 : DC0-1mA (approx.100Ω)	3 : DC0-5V (1k)	3 : AC200V±10%, 50/60Hz	
A4 : DC0-100mV (approx.1MΩ)	C4 : DC0-5mA (approx.100Ω)	4 : DC 0-10V (2k)	4 : AC220V±10%, 50/60Hz	
A5 : DC0-1V (approx.1MΩ)	C5 : DC0-10mA (approx.100Ω)	5 : DC1-5V (1k)	5 : DC24V±10%	
A6 : DC0-5V (approx.1MΩ)	C6 : DC0-16mA (approx.100Ω)	A : DC0-1mA (10k)	0 : other than those above	
A7 : DC0-10V (approx.1MΩ)	C7 : DC4-20mA (approx.100Ω)	B : DC0-5mA (2k)		
A8 : DC1-5V (approx.1MΩ)	D1 : DC ± 10 µA (± 100mV)*1	C : DC0-10mA (1k)		
B1 : DC ± 10mV (approx.1MΩ)	D2 : DC ± 100 µA (± 100mV)	D : DC0-16mA (600)		
B2 : DC ± 50mV (approx.1MΩ)	D3 : DC ± 500 µA (± 100mV)	E : DC1-5mA (3k)		
B3 : DC ± 60mV (approx.1MΩ)	D4 : DC ± 1mA (approx.100Ω)	F : DC4-20mA (750)		
B4 : DC ± 100mV (approx.1MΩ)	D5 : DC ± 5mA (approx.100Ω)	0 : other than those above		
B5 : DC ± 1V (approx.1MΩ)	D6 : DC ± 10mA (approx.100Ω)			
B6 : DC ± 5V (approx.1MΩ)	00 : other than those above			
B7 : DC ± 10V (approx.1MΩ)				

*1. Circuit voltage 15V for an input of 10 µA.


Open of current output: even if the current output terminal is used in a state of regular open, there is no problem. Also, a voltage of approx. 25V occurs on the output terminal.

UR-1 precise resistance unit (selling separately)

Please use a UR-1 combined with a constant response of voltage input. When changing the constant response a hot line state at the time of current input, if measures against open are necessary, connect UR-1 to socket and convert it into a voltage signal before using it. (UR-1, the resistance specified)


Response speed

Range of response time is 0.5-40 sec. (when changing input from 0 to 100%). Set it with the front volume.

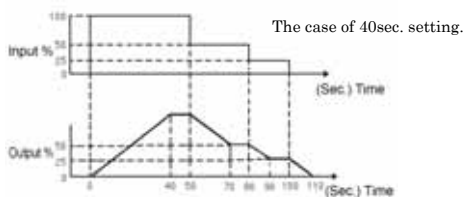


CRTP-C6F5
(80 × 50 × 121mm/450g)

Connection diagram

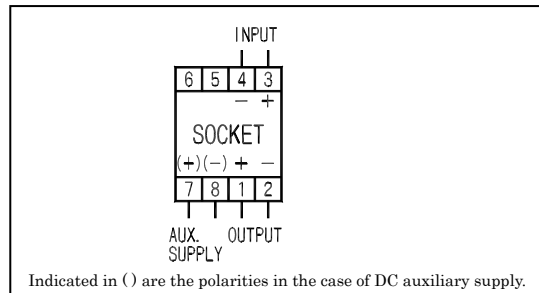

Block diagram

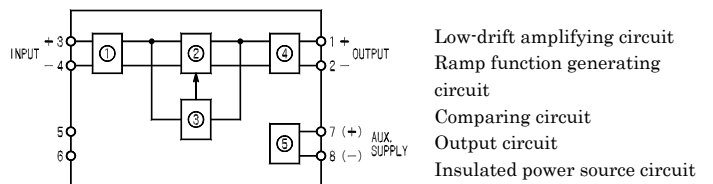

Purchase specifications

